



Temperature



High IP value



Shock / Vibration resistant



Magnetic field proof




SMD LED Light

### Technical Data - Electrical Ratings


Voltage Supply	12V / 24V / 48V / 110-220V - AC/DC	
Signal Type	Multi (Continuous/Flashing/Strobe)	
Light Colors	Red, Yellow, Green, Blue, White, Amber	
Power Consumption	R:3W G:2,2W Other Lights:1W Bzr:0,5W	
Connection	Cable	
Buzzer Output	105 dB @ 1 meter 127 dB @ 1 meter (Optional)	(B Type) (BH Type)
Buzzer Tone Type	Pulse 7 Melodies	(B Type) (BH Type)
Dimensions	82 x 82 x 102 mm	
Weight Approx	214g	
Protection	IP65	
Body Material	ABS	
Mounting	Wall Mount	
Luminous Source	LED	
Lens Material	Polycarbonate	
Temperature Range	-20°C to +50°C	

### Technical Drawings

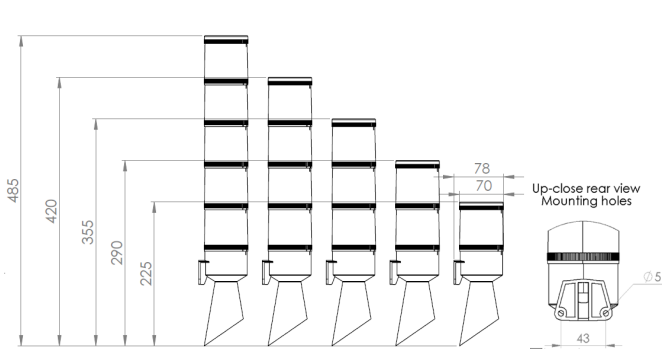


### Connections

#### 12V/24 V



- Red + Buzzer (+V)
- Green (+V)
- Yellow(+V)
- Blue(+V)
- White (+V)
- Black (0V)

#### 110V/220 V



- Thick Red (48V/220V In)
- Thick Black (48V/220V In)
- Thin Green (24V Out)
- Thin Red + Bzz (+24V In)
- Thin Green (+24V In)
- Thin Yellow (+24V In)
- Thin Blue(+24V In)
- Thin White (+24V)

### Code Key

### İL - XMB -BH - 245

#### SIGNAL TYPE

- S** : Continuous
- F** : Flashing
- D** : Rotate
- Ç** : Strobe
- M** : Multi(Continuous/Flashing/Strobe/Rotate)

#### BUZZER

- Blank**: No Buzzer
- B** : With Buzzer

#### BODY TYPE

- Q**: Q Type Horn
- B**: B Type Horn

#### NUMBER OF SEGMENTS

- 1** : R
- 2** : R/G
- 3** : R/G/Y
- 4** : R/G/Y/B
- 5** : R/G/Y/B/W

#### SUPPLY VOLTAGE

- 12** : 12V AC/DC    **11** : 110 VAC
- 24** : 24V AC/DC    **22** : 220 VAC
- 48** : 48V AC/DC