




Technical Data - Electrical Ratings

Voltage Supply	12V / 24V / 48V / 110-220V - AC/DC
Signal Type	Multi (Continuous/Flashing)
Light Colors	Red, Yellow, Green, Blue, White, Amber
Power Consumption	Red:1,5W Other Colors:0,9W Bzr:0,5W
Buzzer Output	92 dB @ 1 meter
Buzzer Tone Type	Pulse
Dimensions	Ø55 x 207 mm
Weight Approx	136g
Protection	IP65
Body Material	ABS
Mounting	M30 Locknut
Luminous Source	LED
Lens Material	Polycarbonate
Temperature Range	-20°C to +50° C


Technical Drawings

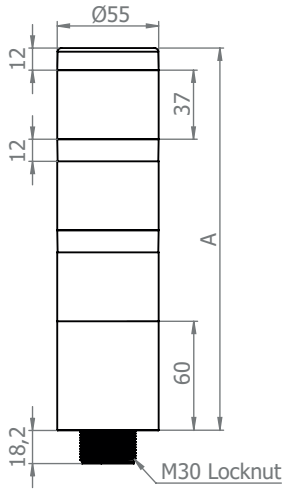


	A
..-GR-..1	109 mm
..-GR-..2	158 mm
..-GR-..3	207 mm
..-GR-..4	256 mm
..-GR-..5	305 mm

Connections

24 VDC

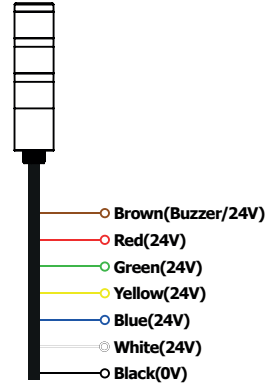

220 VAC

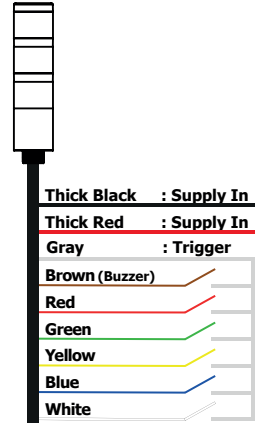

Code Key

İL - XPM5B - GR - 243

SIGNAL TYPE

- S** : Continuous
- F** : Flashing
- M** : Multi (Continuous / Flashing / Strobe / Rotate)

BODY

- 5** : Q50

BUZZER

- Blank** : No Buzzer
- B** : With 92 dB Buzzer

MOUNTING TYPE

- KT** : Base Mount
- GR** : Locknut Mount
- KD** : Adjustable Angle Mount
- KL** : L Bracket

NUMBER OF SEGMENTS

- 1** : R
- 2** : R / G
- 3** : R / G / Y
- 4** : R / G / Y / B
- 5** : R / G / Y / B / W

SUPPLY VOLTAGE

- 12** : 12 VDC
- 24** : 24 VDC
- 11** : 110 VAC
- 22** : 220 VAC