

# İLX... - QH-1 Series 1 Layer Q70 SMD LED Design Horn Combination



## Technical Data - Electrical Ratings

Voltage Supply	12V / 24V / 48V / 110-220V - AC/DC
Signal Type	Multi (Continuous/Flasher) (Inquire for more modes)
Light Colors	Red, Yellow, Green, Blue, White, Amber
Power Consumption	R: 3W G: 2,2W Y: 1W, B: 1W, W: 1W
Connection	With Cable
Buzzer Output	120 dB @ 1 meter (QH Type) 105 dB @ 1 meter (Q Type)
Buzzer Tone Type	7 Selectable Melodies (QH Type) Pulse (Q Type)
Dimensions	70 x 78 x 127mm
Weight Approx	190g
Protection	IP65
Body Material	ABS
Mounting	Base Mount
Luminous Source	LED
Lens Material	Polycarbonate



Temperature



High IP value



Shock / Vibration resistant




Magnetic field proof




SMD LED Light

## Technical Drawings

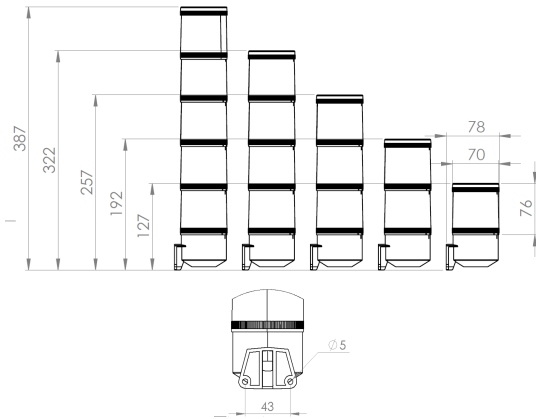


## Connections

### 12/24/48 VDC



Red (+V)  
Black (0V)

### 220 VAC



220V AC

## Code Key

## İL - XMB -QH - 24K

### SIGNAL TYPE

**S** : Continuous  
**F** : Flashing  
**D** : Rotate  
**Ç** : Strobe  
**M** : Multi(Continuous/Flashing/Strobe/Rotate)

### BUZZER

**Blank**: No Buzzer  
**B** : With Buzzer

### BODY TYPE

**Q** : Q Type Horn  
**B** : B Type Horn

### LENS COLOR

**K** : Red ●  
**S** : Yellow ●  
**Y** : Green ●  
**M** : Blue ●  
**B** : White ○

### SUPPLY VOLTAGE

**12** : 12V AC/DC  
**24** : 24V AC/DC  
**48** : 48V AC/DC  
**11** : 110V AC  
**22** : 220V AC