





Technical Data - Electrical Ratings

Voltage Supply	12-24VAC/DC, 5VDC, 48VDC, 110-220VAC	
Signal Type	Multi (Continuous/Flashing/Strobe/Rotate)	
Light Colors	Red, Yellow, Green, Blue, White, Amber	
Power Consumption	Light:3,2W Bzr:0,5W	
Connection	Cable, Car Outlet, USB Cable	
Buzzer Output	92 dB @ 1 meter 110 dB @ 1 meter (Optional)	(B Type) (BH Type)
Buzzer Tone Type	Pulse 7 Melodies	(B Type) (BH Type)
Battery/Operation Life (Strobe Mode)	2000mAh, Red: LiFePO4, other colors: Li-Ion Red : 12 hrs, other colors : 20 hrs	
Dimensions	Check drawing	
Weight Approx	Lamp: 305g, Cage(Optional): 225g	
Protection	IP65	
Body Material	ABS	
Mounting	Screw + Base Mounting	
Luminous Source	LED	
Lens Material	Polycarbonate	
Temperature Range	-20°C to +50°C	

Technical Drawings

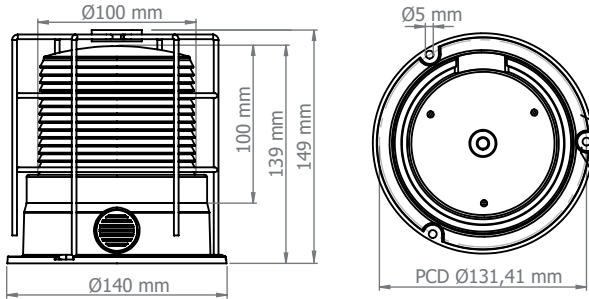

Connections

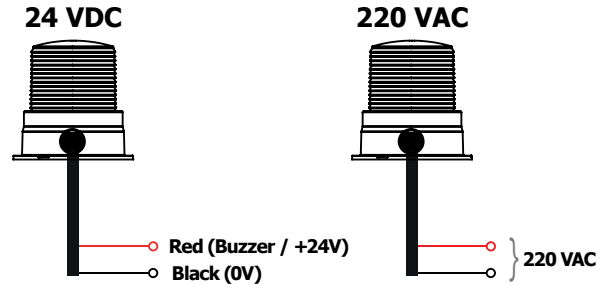

Code Key

İL - XMB - T10 - 24K - PL - MP

CONNECTION TYPE

- X** : Cable
- XUSB** : USB Cable (Only with 5VDC Supply)
- XJ** : Car Outlet (With 5VDC, 12-24VAC/VDC Supply)

SIGNAL TYPE

- S** : Continuous
- F** : Flashing
- D** : Rotate
- Ç** : Strobe
- M** : Multi (Continuous / Flashing / Strobe / Rotate)

BUZZER

- Blank** : No Buzzer
- B** : With 92 dB Buzzer
- BH** : With 110 dB Buzzer

*Buzzers can be used except for 5V powered products.

MOUNTING TYPE

- T** : Base Mounting
- MM** : Magnetic Mounting

PROTECTION OPTION

- Blank** : No Metal Protection
- MP** : With Metal Protection

BATTERY OPTION

- Blank** : No Battery
- PL** : With Battery

LENS COLOR

- K** : Red ●
- S** : Yellow ●
- Y** : Green ●
- M** : Blue ●
- B** : White ○
- T** : Amber ●

SUPPLY VOLTAGE

- 5** : 5 VDC
- 12** : 12 VAC/VDC
- 24** : 24 VAC/VDC
- 48** : 48 VDC
- 11** : 110 VAC
- 22** : 220 VAC

BODY

- 10** : Q100